IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: William B. Kerfoot Art Unit: Unknown Serial No.: Continuation of 09/606,952 Examiner: Unknown

Filed

Title : MICROPOROUS DIFFUSION APPARATUS

Commissioner for Patents Washington, D.C. 20231

PRELIMINARY AMENDMENT

Please enter this Preliminary Amendment as follows:

In the Specification:

Please add before the first line of the specification the following:

This application is a continuation application of application serial no. 09/606,952 filed June 29, 2000 (allowed US Patent No. 6284143) which was a continuation of U.S. application serial no. 09/220,401, filed December 24, 1998 (allowed US Patent 6,083,407), which is a continuation of U.S. application serial no. 08/756,273, filed November 25, 1996 (allowed US Patent 5,855,775) which was a continuation-in-part of application Serial No. 08/638,017 filed on April 25, 1996 (abandoned) which was a continuation-in-part of application Serial No. 29/038,499 filed on May 5, 1995 (abandoned). The disclosure of the prior applications are considered part of and are incorporated by reference in the disclosure of this application.

In the Claims:

Please cancel claims 1-8.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EL 485 578 3/5 US

I hereby certify under 37 CFR \$1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C 20231.

Date of Deposit

Signature

Typed or Printed Name of Person Signing Certificate

Applicant: William B. Kerfoot Attorney's Docket No.: 10578-002005

Serial No.: Continuation of 09/220,401

Filed

Page: 2

Please add claims 9-25, as follows.

9. A method for removal of contaminants in a soil formation comprises: supplying ambient air and ozone at concentrations to effect removal of the contaminants; producing microbubbles containing the ambient air and ozone at concentrations to effect removal of contaminants; and

introducing the microbubbles containing the ambient air and ozone at concentrations to effect removal of contaminants into the soil formation under conditions that contaminants in a dissolved state in the soil formation are pulled out of the soil formation through the microbubbles and are provided in a vapor state within the microbubbles to react with the ozone contained in the microbubbles in accordance with Henry's law.

- 10. The method of claim 9 wherein the microbubbles are sized in accordance with a porosity characteristic of the soil formation.
- 11. The method of claim 9 wherein introducing further comprises:

 providing a plurality of injection wells to introduce the microbubbles containing the ambient air and ozone.
- 12. The method of claim 11 wherein introducing further comprises: using a plurality of microporous diffusers in the plurality of injection wells to introduce the microbubbles containing the ambient air and ozone.
- 13. The method of claim 9 wherein the soil formation contaminants with a Henry's constant in the order of about 2.59×10^{-2} to 4.48×10^{-5} .
- 14. The method of claim 9 wherein contaminants in the soil formation are decomposed by ozone interaction in the bubbles with the contaminants.
- 15. The method of claim 9 wherein the fine bubbles have an initial bubble size at least between about 5 to 200 microns.

Applicant: William B. Kerfoot Attorney's Docket No.: 10578-002005

Serial No.: Continuation of 09/220,401

Filed

Page : 3

16. A method for removal of contaminants in a soil formation comprises:

providing a plurality of injection wells and introducing ambient air and ozone as microbubbles through the injection wells by using a corresponding micro-porous diffuser for each one of the plurality of injection wells;

surrounding the micro-porous diffusers with a sand pack disposed between the microporous diffusers and the surrounding soil formation; and

introducing ambient air and ozone as microbubbles by using micro-porous diffusers in the injection wells under conditions that moist soils promote contaminants that exist in a dissolved state in the soil formation to be pulled out of the soil formation through membranes of the microbubbles and react in a vapor state within the microbubbles with the ozone contained in the microbubbles.

- 17. The method of claim 16 wherein the microbubbles increase the lifetime of ozone in the soil formation.
- 18. The method of claim 16 wherein removal of contaminants can occur without a vapor extraction.
- 19. The method of claim 16 further comprising pulsing a water phase to provide steady upward migration of the micro-fine bubbles through the soil formation.
- 20. The method of claim 16 wherein the soil formation contains chlorinated hydrocarbons.
 - 21. The method of claim 16 wherein the soil formation contains chlorinated ethenes.
- 22. The method of claim 16 wherein the contaminants include chlorinated ethenes including dichloroethene, trichloroethene, and/or tetrachloroethene.
 - 23. The method of claim 16 wherein the micro-porous diffusers have a pore size

Applicant: William B. Kerfoot Attorney's Docket No.: 10578-002005

Serial No.: Continuation of 09/220,401

Filed: Page: 4

between about 5 to 200 microns to provide the fine bubbles.

24. The method of claim 16 wherein the micro-porous diffusers have a pore size selected to match a porosity characteristic of the surrounding soil formation.

25. The method of claim 16 wherein the micro-porous diffusers have a pore size selected to match a porosity characteristic and a permeability characteristic of the surrounding soil formation.

Applicant: William B. Kerfoot

Serial No.: Continuation of 09/220,401

Filed

Page

: 5

Attorney's Docket No.: 10578-002005

REMARKS

Applicant has filed this continuation application in order to have additional patentable subject matter examined and considered.

Applicant has also enclosed a copy of the informal drawings that were originally filed in the prior application, and a copy of the formal drawings that were filed in the patent application in response to the Notice of Allowance. Thus, this case has been filed with formal drawings.

Respectfully submitted,


Reg. No. 29,670


Fish & Richardson P.C. 225 Franklin Street

Boston, MA 02110-2804 Telephone: (617) 542-5070

Facsimile: (617) 542-8906

20063395.doc

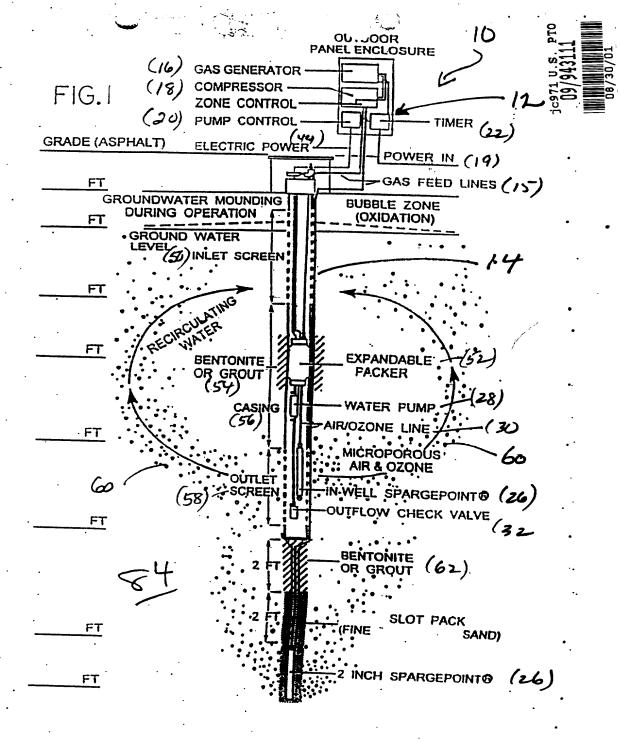

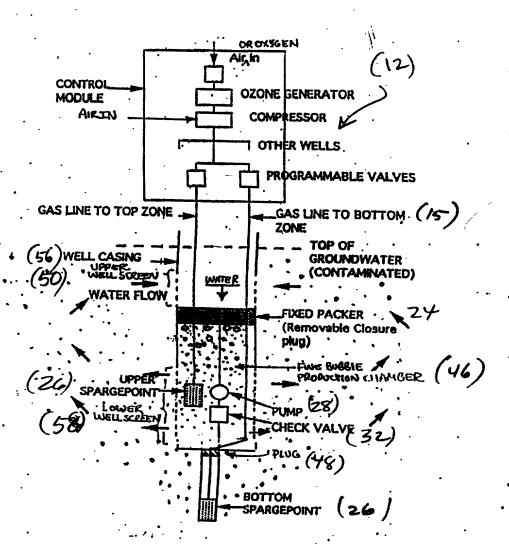



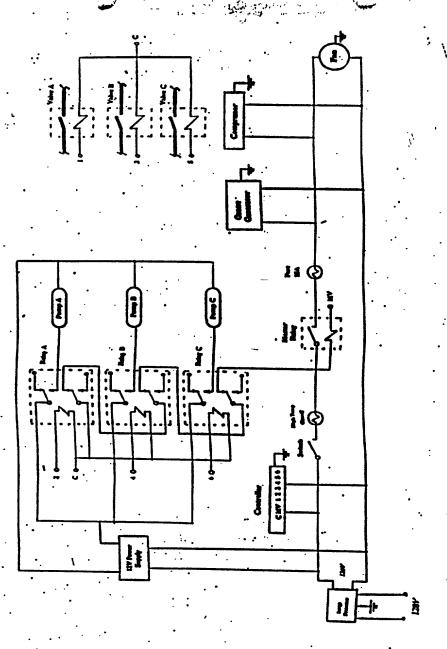


FIGURE 4

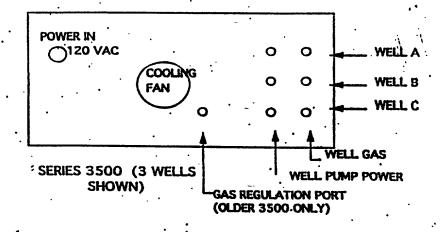

- 71 AC to DC Power Converter(or trickle charged lead acid battery)
- . 7.2 Ozone Generator
 - 73 Well Gas Relays (3 wells shown)
 - 7.4 Compressor
 - 7 5 Master Relay
 - 76 15 A Main Fuse
 - 7 7 Programmable Timer-Controller
- 7 8 Power Strip
- 7 9 Gas Regulator & Pressure Gage
 - 80 Solenoid Manifold(Number depends on Series & Number wells)
 - **81** Ground Fault Interruptor
 - 2. Cooling Fan



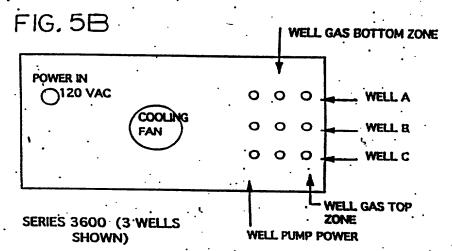
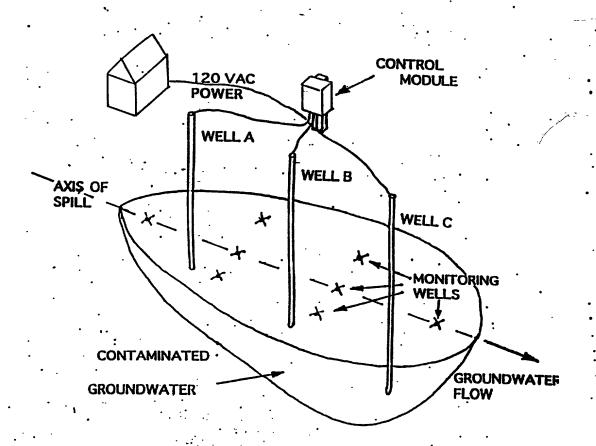


FIGURE 6 C-SPARGER TH SYSTEMS - TYPICAL REMEDIATION SYSTEM CONFIGURATION




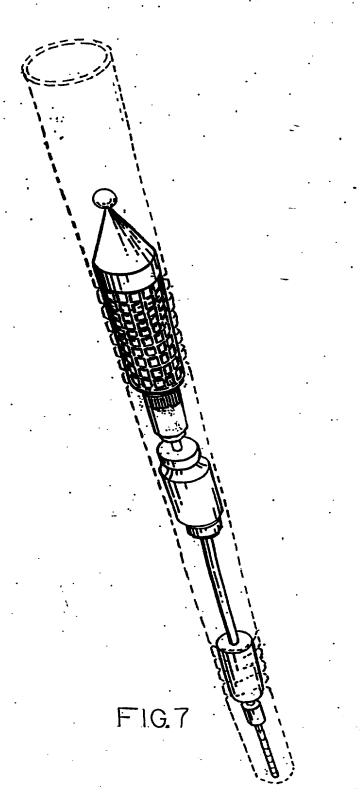




FIG.8

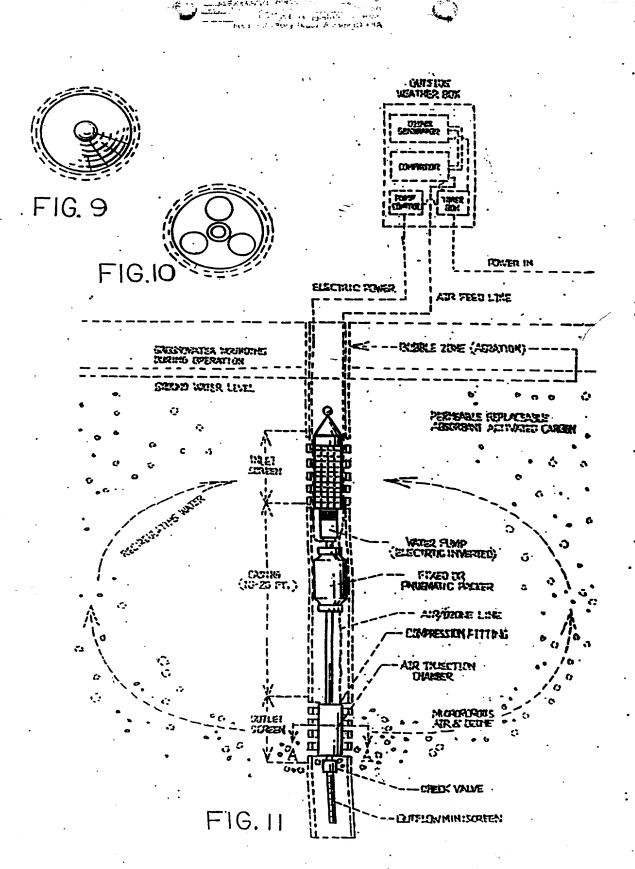

PASS-THROUGH THREADED MICROPOROUS SPARGEPOINT & ASSEMBLY [ATTACHES TO TURKING BUNDLE]

Alexand of

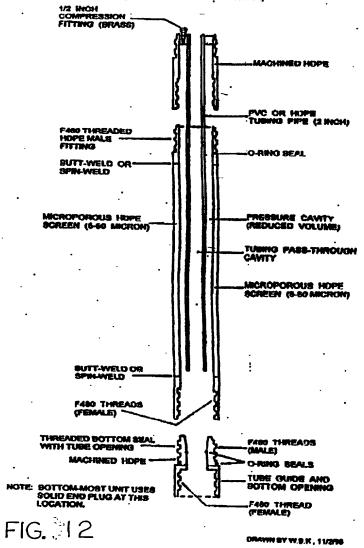


TABLE 1 C-SPARGER TM MODEL SERIES 3500 & 3600 SPECIFICATIONS

3500 Series 3600 Series CONTROL MODULE 120V AC,15 amp 120V AC,15 amp **External Power** Well pumps Power 12V DC, power converter * 12V DC, powerter * 3/4 hp (not for 3/4 hp continuous service) (continuous OK) compressor **Ozone** Generator ATS-250 VCX-2 Gas tubing 1/4 in. 3/8 h. -Box Size 28"x 20 x11" 33"x 25 x 12" Approx. Wt Control Mod. 73 lbs (M-3503) 100 lbs (M-3603) Pump/gas Line Length 100 ft. (1 for each well) 100 ft' ~ IN-WELL UNIT (Each well) **Fixed Packer** Spargepoint TM Top Bottom 1 in. 2 in. XP-30ft Water Pump XP-30 ft. inlet & outlet Screens 10-20 slots/ft 10-20 slots/ft Check valve, water one, 1/4 in. one, 1/4 in. Timer/Controller PSCZ-600Z PSCZ-900Z current production, earlier units used a trickle charged lead acid battery

FIG.13